

Ultrasonic Bath For Coins With 200W Heating Power For Removing Dirt 2.85 Gallon

Basic Information

- Place of Origin:
- Brand Name:
- Certification: CE ROHS FCC SGS

China

Skymen

JP-040S

Negotiation

1unit per box

8000 pcs per month

In Stock

- Model Number:
- Minimum Order Quantity: 1 unit
- Price:
- Packaging Details:
- Delivery Time:
- Supply Ability:



Product Specification

| • | Highlight: | 30min Timer Ultrasonic Parts Cleaners, Bench Top Ultrasonic Cleaner SUS304, SUS304 Ultrasonic Cleaning Equipment |
|---|-------------------|--|
| • | G.W: | 8.4KG |
| • | Material: | SUS 304 |
| • | Heating Power: | 200W |
| • | Ultrasonic Power: | 120W/240W |
| • | Tank Size: | 12*9*6 Inch |
| • | Capacity: | 2.85 Gallon |
| • | Frequency: | 40KHz |
| • | Model: | JP-040S |
| | | |



More Images



Product Description

| Model | <u>JP-040S</u> | |
|----------------------|---|--|
| Ultrasonic Frequency | 40KHz | |
| Fransducer Quantity | 4pcs | |
| Ultrasonic Power | 240W/120W | |
| Heating Power | 200W | |
| Fank Capacity | 10.8L/2.85Gallon | |
| Fank Size | 300*240*150mm | |
| Machine size | 380*290*280mm | |
| Packing size | 440*365*360mm | |
| Net weight | 7.6KG | |
| Gross weight | 8.6KG | |
| Time Range | 1~30 minutes | |
| Temperature Range | Room temperature~80 /176 | |
| Fank material | SUS 304 | |
| Tank thickness | 1mm | |
| Shell material | SUS 201 | |
| Shell thickness | 0.8mm | |
| Slope panel degree | 20° | |
| Drain Valve | / | |
| General switch | / | |
| Degas | 1 | |
| Semi-wave | / | |
| Lid | / | |
| Basket | / | |
| Voltage | 110V; 220V | |
| Plug | European Plug; US plug; Austrslian Plug; British Plu | |
| Detergent suggestion | No stronger acid or alkali | |
| DEM | Yes | |
| DEM MOQ | 50pcs | |
| Drigin | Guangdong China | |
| Business category | | |
| Lead time | 7 days after payment if order quantity is below 20pcs | |
| Payment term | By cash; by credit card; by Paypal | |
| Warranty | 1 year | |

Ultrasonic cleaning methods are more common than conventional cleaning methods, especially the surface of the workpiece is complex, such as some surface irregularities, mechanical parts with blind holes, some products that are particularly small and have high requirements for cleanliness such as watches and clocks. Precision mechanical parts, electronic components, circuit board components, etc., can achieve very good results by ultrasonic cleaning.


The cleaning effect is good, the cleanliness is high and the cleanliness of all the workpieces is consistent. The cleaning speed is fast, the production efficiency is improved, and the cleaning liquid is not required to be touched by human hands, which is safe and reliable. Deep holes, slits and hidden parts of the workpiece can also be cleaned. No damage to the surface of the workpiece, saving solvent, heat, work site and labor.

Stainless Bench Top



| Model | Capacity | Tank Size | Ultrasonic Power | Heating Power | Frequency | Tank thickness | Material |
|---------|----------|-------------|---------------------|------------------|-----------|-------------------|----------|
| | (L) | (L*W*H)mm | (W) | (W) | (KHz) | (mm) | SUS304 |
| JP-008 | 0.8 | 150*85*65 | 35 | 0 | 40 | 1 | SUS304 |
| JP-009 | 0.9 | 150*135*65 | 60 | 100 | 40 | 1 | SUS304 |
| JP-010T | 2 | 150*165*100 | 60 | 100 | 40 | 1 | SUS304 |
| JP-020S | 3.2 | 240*135*100 | 120 | 100 | 40 | 1 | SUS304 |
| JP-030S | 4.5 | 300*150*100 | 180 | 200 | 40 | 1 | SUS304 |
| JP-031S | 6.5 | 300*150*150 | 180 | 200 | 40 | 1 | SUS304 |
| JP-040S | 10 | 300*240*150 | 240 | 200 | 40 | 1 | SUS304 |
| JP-060S | 15 | 330*300*150 | 360 | 300 | 40 | 1 | SUS304 |
| JP-080S | 22 | 500*300*150 | 480 | 500 | 40 | 1 | SUS304 |



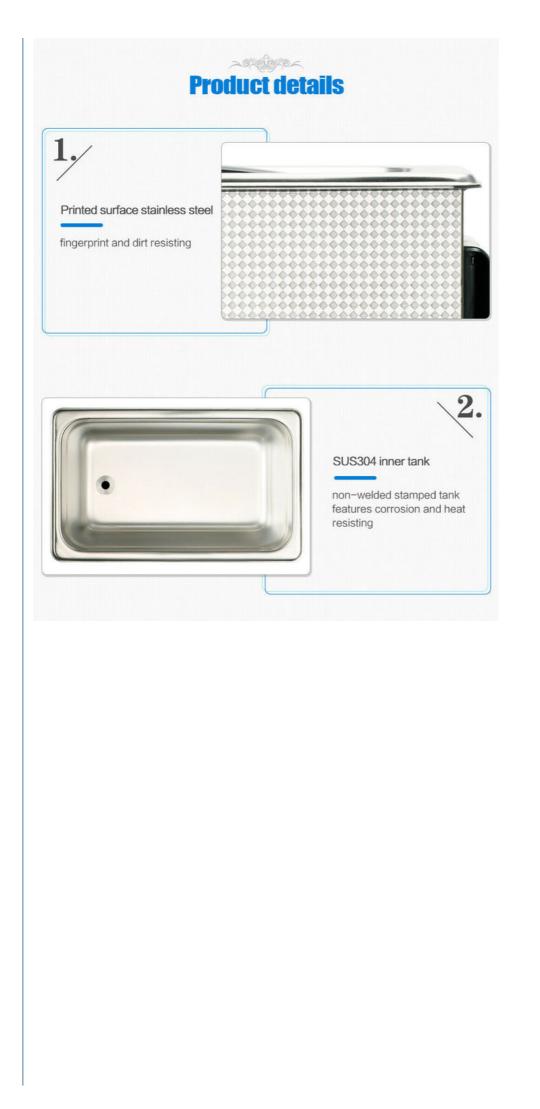





PAY ATTENTION ON DETAILS



Insulated handle design Anti-static and anti-high temperature, more secure







Stainless steel drain valve One-half inch large drain valve, quicker to drain




Cooling vents Fast heat dissipation, protecting the circuit board and enhancing the service life













Heat - resistant power cord One-half inch large drain valve, quicker to drain

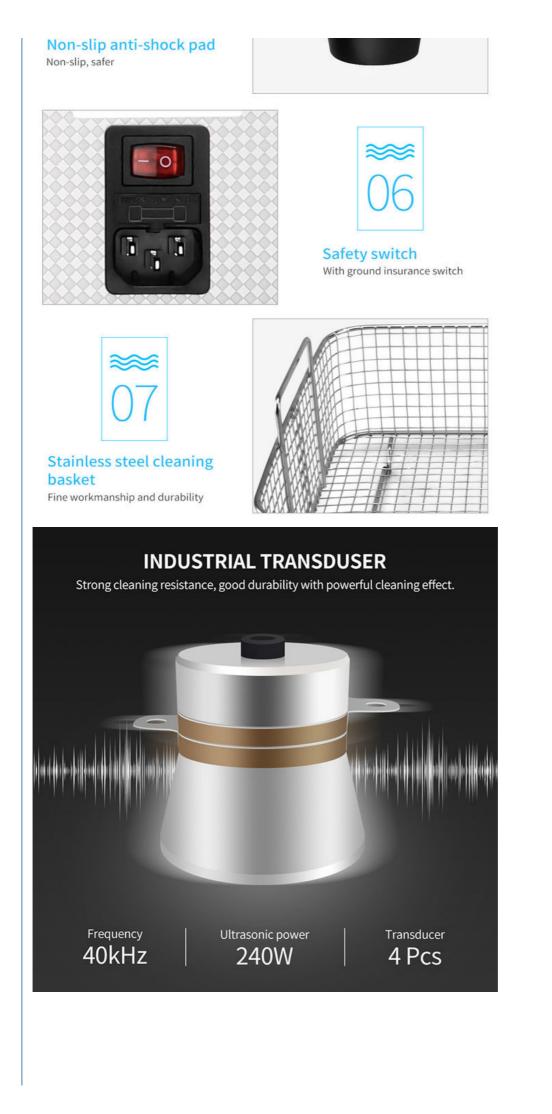

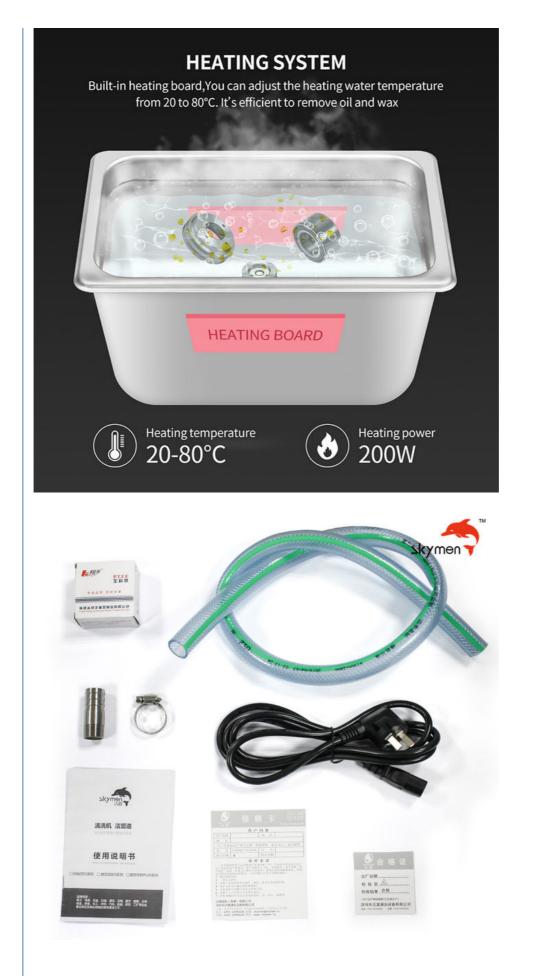

Application Area:

MULTIPURPOSE CLEANING

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.








Before

-



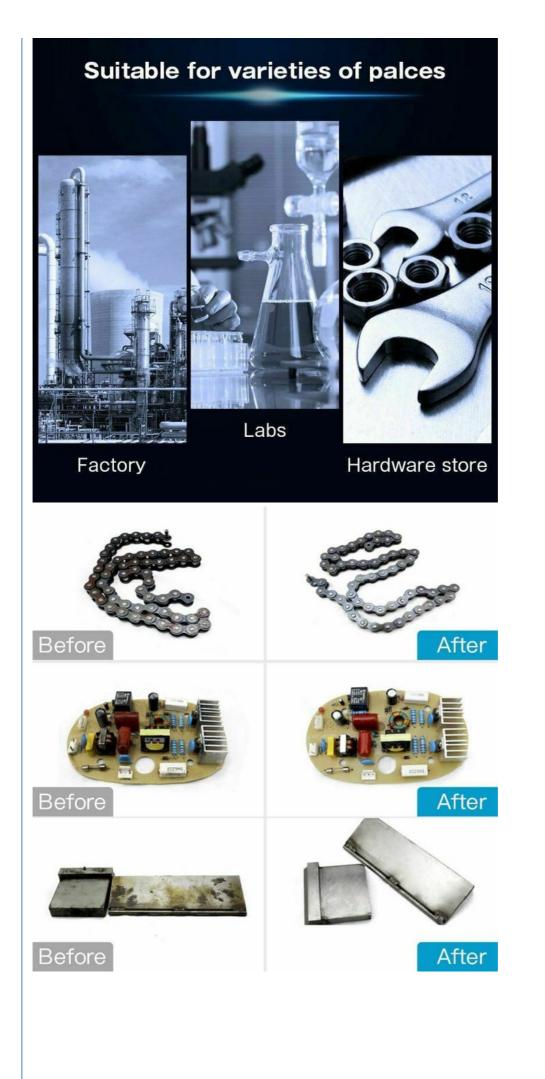

PRODUCT FEATURES

mechanical timing: The working time adjustable from 0-30 minutes or normal open mode.

mechanical control:

mechanical control heater, 20-80 adjustable, temperature error within +-2

3

1

2

high quality bath: High qualtiy SUS 304 stainless steel punch forming bath with noise proof

anti-skid treatment:

the machine is steady with the non-slip,shock-proof,anti-static,pressure-proof mats at the bottom

5

4

ceramic heater: New ceramic heater is stable and efficient

6

Humanized design,remarkable cleaning effect: Tank capactity over 6L with the drain vavle; high cleaning efficiency, no harm to surface

Industrial Ultrasonic Cleaning Machine



| Model | Capacit y | Tank Size | Transducer s | Ultrasonic Power | Heating Power | Tank thickness | Frequency |
|---------------|--------------|---------------|-----------------|---------------------|---------------|----------------|-----------|
| | (L) | (L*W*H)mm | (pcs) | (W) | (W) | (mm) | (KHz) |
| JP-120ST | 38 | 500X300X250 | 12 | 600 | 1500 | 2 | 28/40 |
| JP-180ST | 53 | 500X350X300 | 18 | 900 | 1500 | 2 | 28/40 |
| JP-240ST | 77 | 550X400X350 | 24 | 120 | 3000 | 2 | 28/40 |
| JP-300ST | 99 | 550X450X400 | 30 | 1500 | 3000 | 2 | 28/40 |
| JP-301ST | 99 | 800X300X400 | 30 | 1500 | 3000 | 2 | 28/40 |
| JP-360ST | 135 | 600X500X450 | 36 | 1800 | 4500 | 2 | 28/40 |
| JP-480ST | 175 | 700X500X500 | 48 | 2400 | 6000 | 2 | 28/40 |
| JP-600ST | 264 | 800X600X550 | 60 | 3000 | 6000 | 2 | 28/40 |
| JP-720ST | 360 | 1000X600X600 | 72 | 3600 | 9000 | 2 | 28/40 |
| JP- 1108ST | 540 | 1000X900X600 | 108 | 5400 | 18000 | 2 | 28/40 |
| JP- 1144ST | 960 | 1200X1000X800 | 144 | 7200 | 27000 | 2 | 28/40 |

Immersible Transducer Plate Image:



| | Model | Plate Size | Transducer s | Ultrasonic Power | Generator | Suitable tank |
|---|----------|-------------|-----------------|------------------|-----------|---------------|
| | | (L*W*H)mm | (pcs) | (W) | (set) | (L) |
| ſ | JP-1006I | 305*205*100 | 6 | 300 | 1 | 10~15 |
| ſ | JP-1012I | 355*305*100 | 12 | 600 | 1 | 30~40 |
| | JP-1018I | 340*280*100 | 18 | 900 | 1 | 60~70 |
| | JP-1024I | 430*280*100 | 24 | 1200 | 1 | 70~80 |
| | JP-1030I | 460*370*100 | 30 | 1500 | 1 | 90~100 |
| | JP-1036I | 550*450*100 | 36 | 1800 | 1 | 130~140 |
| | JP-1048I | 600*450*100 | 48 | 2400 | 2 | 170~180 |

Immersible Transducer Tube Image:



1.5

| | Tube Size | Transduce | Ultrasonic Power | Generat | Length of wire | |
|---------|-----------|-----------|------------------|---------|----------------|--|
| Model | | rs | | or | Length of whe | |
| | (D*H)mm | (pcs) | (W) | (set) | (M) | |
| JM-1003 | 57*180 | 3 | 150 | 1 | 1.5 | |
| JM-1006 | 57*300 | 6 | 300 | 1 | 1.5 | |
| JM-1012 | 57*550 | 12 | 600 | 1 | 1.5 | |
| JM-1018 | 57*750 | 18 | 900 | 1 | 1.5 | |
| JM-1024 | 57*1000 | 24 | 1200 | 1 | 1.5 | |
| JM-1036 | 57*1520 | 36 | 1800 | 1 | | |

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

86-755-27094405

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.



Skymen Technology Corporation Limited

Skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen

info@skymen.cc