

200W Heater 1.19 Gallon Benchtop Ultrasonic Bath SUS304 For Gear

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Supply Ability:
- JP-030S 1 unit Negotiation 1 unit per box In Stock 8000 pcs per month

CE ROHS FCC SGS

China

Skymen



Product Specification

 Highlight: 	1.19 Gallon Benchtop Ultrasonic Bath, 200W Heater Benchtop Ultrasonic Bath, SUS304 Gear Ultrasonic Cleaner
• G.W:	5.5KG
Material:	SUS304
 Heating Power: 	200W
Ultrasonic Power:	180W/90W
• Tank Size:	12*6*4 Inch
Capacity:	1.19 Gallon
 Frequency: 	40KHz
Model:	JP-030S



More Images



Product Description

lodel	<u>JP-030S</u>			
Iltrasonic Frequency	40KHz			
ransducer Quantity	3pcs			
Iltrasonic Power	180W/90W			
leating Power	200W			
ank Capacity	4.5L/1.19Gallon			
ank Size	300*150*100mm			
lachine size	380*200*225mm			
acking size	410*255*310mm			
et weight	4.8KG			
iross weight	5.5KG			
ime Range	1~30 minutes			
emperature Range	Room temperature~80 /176			
ank material	SUS 304			
ank thickness	1mm			
hell thickness	0.8mm			
lope panel degree	20°			
rain Valve	x			
eneral switch	1			
egas	1			
emi-wave	1			
id	1			
asket	/			
oltage	110V; 220V			
lug	European Plug; US plug; Austrslian Plug; British Plu			
etergent suggestion	No stronger acid or alkali			
EM	Yes			
EM MOQ	100pcs			
rigin	Guangdong China			
usiness category	Manufacturer			
ead time	7 days after payment if order quantity is below 20pcs			
ayment term	By cash; by credit card; by Paypal			
Varranty	1 year			

Principle

The principle of the ultrasonic cleaning machine is mainly to convert the sound energy of the power ultrasonic frequency source into mechanical vibration through the transducer, and to irradiate the ultrasonic wave into the cleaning liquid in the groove through the cleaning tank wall. Due to the radiation of the ultrasonic waves, the microbubbles in the liquid in the tank can be kept vibrated by the action of the sound waves. The adsorption of the dirt and the surface of the cleaning member is destroyed, causing fatigue damage of the dirt layer to be rejected, and the vibration of the gas type bubble scrubs the solid surface.




Model Ca	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency	Tank thickness	Material
	(L)	(L*W*H)mm	(W)	(W)	(KHz)	(mm)	SUS304
JP-008	0.8	150*85*65	35	0	40	1	SUS304
JP-009	0.9	150*135*65	60	100	40	1	SUS304
JP-010T	2	150*165*100	60	100	40	1	SUS304
JP-020S	3.2	240*135*100	120	100	40	1	SUS304







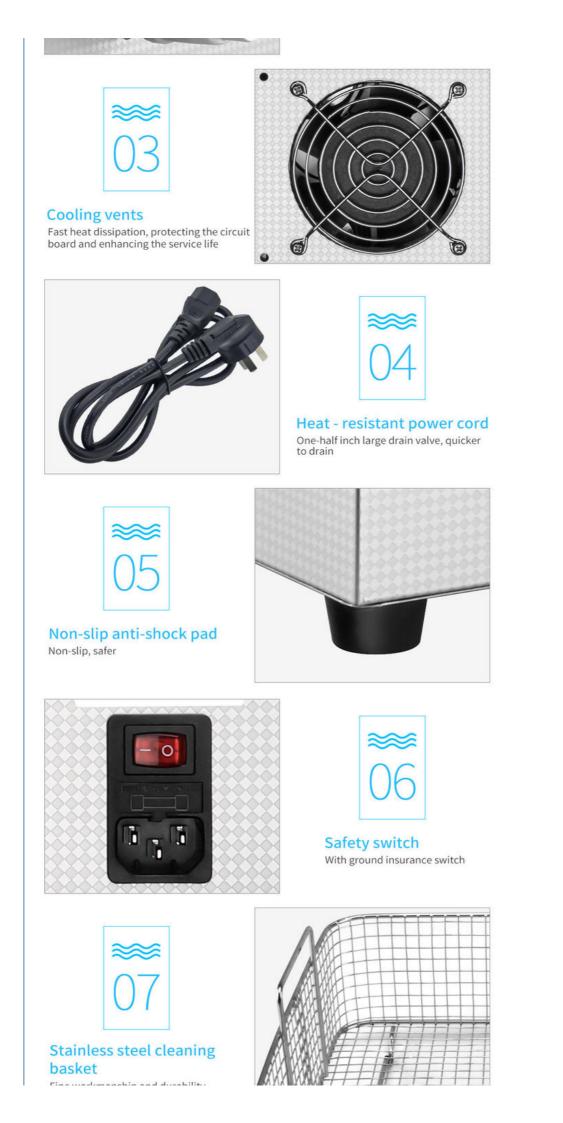



INDUSTRIAL SUS304 TANK

Thickness 1.1mm/Heat-resisting and corrosion-resisting/safe and healthy



One-stop throughout cleaning solution


With thermostat controls and heater; High frequency cleaning ; Intensive cleaning




SPECIAL FUNCTIONS



Skymen Coordinator





Adopt high-quality components distribute power evenly, all transducers work at one frequency vibration resonance effect, normal cleaning performance. point, which achieve a powerful resonance effect, delivery a uniform and thorough cleaning performances.

Application Area:

APPLICATIONS

Scientific Labs

Eyeglass Frames, Lab Glassware, Optical & Contact Lenses, Pipettes, Scientific Instruments, Test Tubes...



2 Jewelry & Metal Decoration Manufacturing

Chains, Charms, Intricate Settings, Precious Metals, Gemstones, Coins, Watchbands...









3 Medical & Dental Lab

Burs, Blood Oxygenators, Cannulae, Dental Instruments, Syringe Parts, Surgical Instruments...



4 Industrial Manufacturing

Assemblies, Gears, Metal & Plastic Parts, Precision Bearings, Relays, Motors, Switches...



5 Electronics Manufacturing

Capacitors, Ceramic Substrates, PC Boards, Packaging Components, Quartz Crystals, SMDs...



6 Auto Industry

Carburetor, Castings, Fuel Injectors, Machined Parts, Stamped Parts, Switches...







Suitable for varieties of palces







Factory

Hardware store



MULTIPURPOSE CLEANING

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.





COMPARISON OF CLEANING EFFECT



Industrial Ultrasonic Cleaning Machine



Model	Capacit	Tank Size	Transducer	Ultrasonic	Heating Power	Tank thickness	Fraguanay	
	У	Talik Size	s	Power	Healing Fower	Tarik (HICKHESS	requency	
	(L)	(L*W*H)mm	(pcs)	(W)	(W)	(mm)	(KHz)	
JP-120ST	38	500X300X250	12	600	1500	2	28/40	
JP-180ST	53	500X350X300	18	900	1500	2	28/40	
JP-240ST	77	550X400X350	24	120	3000	2	28/40	
JP-300ST	99	550X450X400	30	1500	3000	2	28/40	
JP-301ST	99	800X300X400	30	1500	3000	2	28/40	
JP-360ST	135	600X500X450	36	1800	4500	2	28/40	
JP-480ST	175	700X500X500	48	2400	6000	2	28/40	
JP-600ST	264	800X600X550	60	3000	6000	2	28/40	
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40	
JP-	540	540 1000X900X600	108	5400	18000	2	28/40	
1108ST	010				10000	-	20,40	
JP-	960	1200X1000X800	144	7200	27000	2	28/40	
1144ST				. 200	2.000	-	_0, 10	

Immersible Transducer Plate Image:



Model		Plate Size	Transducer s	Ultrasonic Power	Generator	Suitable tank
		(L*W*H)mm	(pcs)	(W)	(set)	(L)
	JP-1006I	305*205*100	6	300	1	10~15
	JP-1012I	355*305*100	12	600	1	30~40
	JP-1018I	340*280*100	18	900	1	60~70
	JP-1024I	430*280*100	24	1200	1	70~80
	JP-1030I	460*370*100	30	1500	1	90~100
	JP-1036I	550*450*100	36	1800	1	130~140
	JP-1048I	600*450*100	48	2400	2	170~180

Immersible Transducer Tube Image:



Model	Tube Size	Transduce	Ultrasonic Power		Length of wire		
		rs		or			
		(D*H)mm	(pcs)	(W)	(set)	(M)	
	JM-1003	57*180	3	150	1	1.5	
	JM-1006	57*300	6	300	1	1.5	
	JM-1012	57*550	12	600	1	1.5	
	JM-1018	57*750	18	900	1	1.5	
	JM-1024	57*1000	24	1200	1	1.5	
	JM-1036	57*1520	36	1800	1		

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.

Our Certificates:

CE, RoHS, FCC, REACH

QUALITY ASSURANCE

SKYMEN has passed more than 20 patents and international certifications, such as CE, ROHS, FCC, ISO13485, ISO9001, PSE.





